

ZXM6-NHLD120 Series

Znshinesolar 9BB **HALF-CELL** Light-Weight Double Glass Mono PV Module




120

Mono Poly Solutions


320W | 325W | 330W | 335W | 340W | 345W

Made with selected materials and components to grant quality, duration, efficiency and through outputs, the ZXM6-NHLD120 double glass modules by ZNSHINE SOLAR feature have both decorative and shading functions. They represent the perfect choice for BIPV and BAPV construction applications. This allows you to produce clean energy while reducing your energy bill.

ZNSHINE SOLAR'S ZXM6-NHLD120 double glass solar modules are tested and approved by international acknowledged laboratories, so that we can offer our customers a reliable and price-quality optimized product.

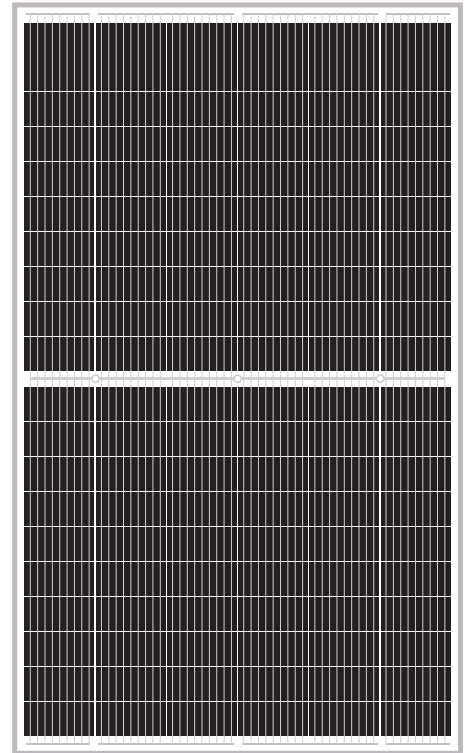

- 12 years product warranty for general double glass modules
- 15 years product warranty only for Residential Rooftop PV system
- 30 years output warranty/0.5% Annual Degradation over 30 years

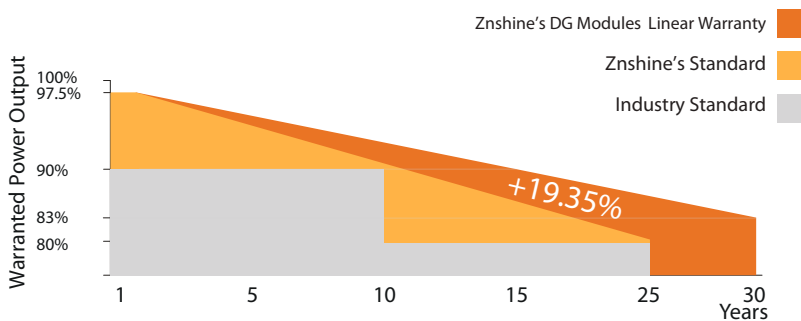

9 Busbar Solar Cell
 9BB No power loss thanks to improved temperature co-efficient caused by 9 busbar solar cell

Better Weak Illumination Response
 Lower temperature coefficient and wide spectral response, higher power output, even under low-light settings

Easy to install
 The module is very light in weight so the installation is easier and transport costs are lower



ZNSHine PV-Tech Co., LTD, founded in 1988, is a world-leading high-performance PV module manufacturer, PV power station developer, EPC and power station operator. With its state-of-the-art production lines, the company boasts module output of 5GW. Bloomberg has listed ZNSHine as a global Tier 1 PV manufacturer and Top 4 reliable PV supplier.

www.znshinesolar.com

ELECTRICAL PROPERTIES | STC*

| Module Type | ZXM6-NHLD120 -320/M | ZXM6-NHLD120 -325/M | ZXM6-NHLD120 -330/M | ZXM6-NHLD120 -335/M | ZXM6-NHLD120 -340/M | ZXM6-NHLD120 -345/M |
|--------------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Nominal Power Watt Pmax(W) | 320 | 325 | 330 | 335 | 340 | 345 |
| Power Output Tolerance Pmax(%) | 320±3% | 325±3% | 330±3% | 335±3% | 340±3% | 345±3% |
| Maximum Power Voltage Vmp(V) | 33.4 | 33.6 | 33.8 | 34.1 | 34.3 | 34.5 |
| Maximum Power Current Imp(A) | 9.59 | 9.68 | 9.77 | 9.85 | 9.92 | 10.01 |
| Open Circuit Voltage Voc(V) | 40.1±3% | 40.3±3% | 40.5±3% | 40.8±3% | 41.0±3% | 41.2±3% |
| Short Circuit Current Isc(A) | 10.16±3% | 10.25±3% | 10.34±3% | 10.43±3% | 10.52±3% | 10.60±3% |
| Module Efficiency (%) | 18.83 | 19.12 | 19.42 | 19.71 | 20.01 | 20.30 |

*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25°C, AM 1.5
 *The data above is for reference only and the actual data is in accordance with the practical testing

ELECTRICAL PROPERTIES | NOCT*

| | | | | | | |
|-------------------------------|-------|-------|-------|-------|-------|-------|
| Maximum Power Pmax(Wp) | 238.3 | 241.9 | 245.5 | 248.7 | 252.0 | 255.8 |
| Maximum Power Voltage Vmpp(V) | 30.9 | 31.1 | 31.3 | 31.4 | 31.5 | 31.7 |
| Maximum Power Current Impp(A) | 7.72 | 7.79 | 7.85 | 7.92 | 7.99 | 8.06 |
| Open Circuit Voltage Voc(V) | 37.3 | 37.5 | 37.7 | 37.8 | 38.0 | 38.2 |
| Short Circuit Current Isc(A) | 8.20 | 8.28 | 8.35 | 8.43 | 8.50 | 8.56 |

*NOCT(Nominal Operating Cell Temperature):Irradiance 800W/m², Ambient Temperature 20°C,AM 1.5,Wind Speed 1m/s
 *The data above is for reference only and the actual data is in accordance with the practical testing

TEMPERATURE RATINGS

| | |
|---------------------------------|-----------|
| NOCT | 44°C ±3°C |
| Temperature coefficient of Pmax | -0.36%/°C |
| Temperature coefficient of Voc | -0.29%/°C |
| Temperature coefficient of Isc | 0.05%/°C |

*Do not connect Fuse in Combiner Box with two or more strings in parallel connection

WORKING CONDITIONS

| | |
|-------------------------|-------------------------------------|
| Maximum system voltage | 1500 V DC |
| Operating temperature | -40°C~+85°C |
| Maximum series fuse | 20 A |
| Maximum load front/back | 3600/1600 with safety factor 1.5 |


MECHANICAL DATA

| | |
|-------------------|---|
| Solar cells | Mono 158.75*79.375mm |
| Cells orientation | 120 (6×20) |
| Module dimension | 1696×1002×30 mm(With Frame) |
| Weight | 22 kg |
| Glass | 2.0mm+2.0mm heat strengthened glass |
| Junction box | IP 68, 3 diodes |
| Cables | H1Z2Z2-K 1×4,0mm ² |
| Connectors | LJQ-3 Taizhou jinxiu Electrical Science & Technology Co., Ltd. manufactured in China |

PACKAGING INFORMATION

| | |
|-----------------|--------|
| Packing Type | 40' HQ |
| Piece/Box | 36 |
| Piece/Container | 1008 |

DIMENSION OF THE PV MODULE (mm)

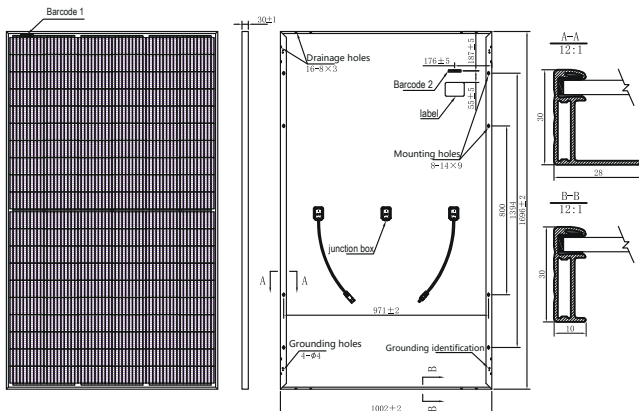

I-V CURVES OF THE PV MODULE

